INSIZE
PRECISION MEASUREMENT

3492 Diversified Dr
Loganville, GA 30052
Office: 470-240-2520
Email: sales@insizeus.com

Connect with us on:

ELECTRONIC CALIPERS (STANDARD MODEL)

1108-150

INSPECTION CERTIFICATE TRACEABLE TO NIST

DATA OUTPUT

INSIZE ISO17025 CERTIFICATE AVAILABLE AT EXTRA CHARGE

- Resolution .0005"/0.01mm
- Buttons: on/off, zero, inch/mm
- Automatic power off, move the digital unit to turn on power
- Battery CR2032, data output
- Made of stainless steel
- Optional accessory: data output cable



Part No.	Range	Accuracy	L	a	b	d	List Price ($)
1108-150*	0-6"/0-150mm	±.0008"	9.291"	.827"	.630"	1.575"	65.00
1108-200*	0-8"/0-200mm	±.0012"	11.260"	.945"	.748"	1.969"	96.10
1108-300*	0-12"/0-300mm	±.0012"	15.748"	.984"	.807"	2.362"	145.00

*Supplied with manufacturer inspection certificate traceable to NIST

ELECTRONIC WATERPROOF CALIPERS

ATTENTION: NO DATA OUTPUT

ATTENTION: IT IS NECESSARY TO SET ZERO AFTER POWER ON EACH TIME

1118-150B

INSPECTION CERTIFICATE TRACEABLE TO NIST

IP67 WATERPROOF

- Accuracy ±.0012"
- IP67 dust/waterproof
- Resolution .0005"/0.01mm
- Button function: zero, on/off, inch/mm, ABS/REL, hold
- Battery CR2032
- Made of stainless steel



Part No.	Range	L	a	b	c	d	List Price ($)
1118-150B*	0-6"/0-150mm	9.291"	.827"	.630"	.630"	1.575"	199.00
1118-200B*	0-8"/0-200mm	11.260"	.945"	.748"	.630"	1.969"	304.00
1118-300B*	0-12"/0-300mm	15.748"	.984"	.807"	.669"	2.362"	364.00

*Supplied with manufacturer inspection certificate traceable to NIST

DIAL CALIPERS

1311-6

SHOCK PROOF

INSPECTION CERTIFICATE TRACEABLE TO NIST

- Shockproof dial indicator
- Made of stainless steel



Dial indicator graduation .001"

Part No.	Range	Accuracy	L	a	b	c	d	D	t	List Price ($)
1311-6*	0-6"	±.0015"	9.252"	.827"	.650"	.630"	1.575"	1.535" DIA	.256"	64.80
1311-8*	0-8"	±.0020"	11.339"	.945"	.748"	.630"	1.890"	1.535" DIA	.256"	86.00
1311-12*	0-12"	±.0020"	16.142"	1.102"	.866"	.787"	2.441"	1.752" DIA	.295"	151.00

*Supplied with manufacturer inspection certificate traceable to NIST

DEPTH BASE ATTACHMENT

6140



- To increase the stability of depth measurement
- Suitable for digital calipers and dial calipers
- Made of stainless steel

Part No.	Application	b	List Price ($)
6140	suitable for calipers with beam width (w) .630"	.354"	24.30

ELECTRONIC CALIPER WITH INTERCHANGEABLE POINTS PART NO. 1526-200

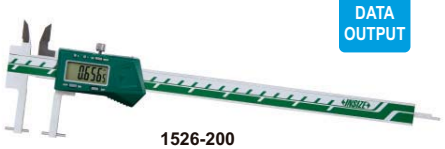

1526-200

DATA OUTPUT

- Supplied with 3 pairs of points and zero setting block for external measurement
- Resolution .0005"/0.01mm
- Buttons: on/off, set, inch/mm, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032, data output
- Made of stainless steel
- Optional accessory: points, depth stop, data output cable

depth stop **6143** (**optional**)



Part No.	List Price ($)
1526-200	439.00

short spherical points (included)



long spherical/flat points (included)



spherical blade points (included)



Point	Range	Accuracy	Application
short spherical points	.5-8.5"/12-212mm (internal)	±.0012"	for grooves inside small hole
long spherical/flat points	1-8.8"/24-224mm (internal) 0-7.5"/0-187mm (external)	±.0012"	spherical points for grooves inside hole flat points for external grooves
spherical blade points	1-8.8"/24-224mm (internal) 0-7.5"/0-187mm (external)	±.0012"	for narrow grooves inside hole

ELECTRONIC DEPTH GAGE WITH MOUNTING HOLES FOR EXTENSION BASE

extension base (**optional**)

1147-200

DATA OUTPUT

- Resolution .0005"/0.01mm
- Buttons: on/off, zero, inch/mm
- Automatic power off, move the digital unit to turn on power
- Battery CR2032, data output
- Made of stainless steel
- Optional accessory: data output cable, extension base

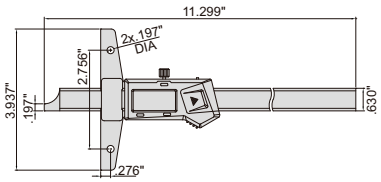

Part No.	Range	Accuracy	List Price ($)
1147-200	0-8"/0-200mm	±.0012"	185.00

ELECTRONIC OUTSIDE MICROMETER



INSPECTION CERTIFICATE TRACEABLE TO NIST

3109-25E

- Resolution .00005"/0.001mm
- Button functions: on/off, set, inch/mm, ABS/INC
- No data output, friction thimble
- LR44 battery, automatic power off
- Carbide measuring faces
- Supplied with spherical anvil



ATTENTION: NO DATA OUTPUT

spherical anvil is included

Part No.	Range	Accuracy	List Price ($)
3109-25E*	0-1"/0-25mm	±.00010"	119.00

*Supplied with manufacturer inspection certificate traceable to NIST

ELECTRONIC HEIGHT GAGE WITH DRIVING WHEEL

1156-300



METAL RACK

DATA OUTPUT

scriber (included)



clamp for protractors (**optional**)



2372-CLAMP

dust cover (included)

dial test indicator holder (**optional**)

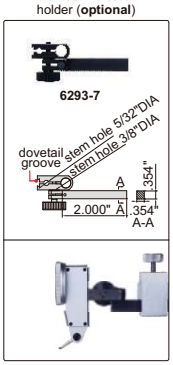

- Resolution .0005"/0.01mm
- Buttons: on/off, zero, inch/mm, preset (+, -), hold
- Automatic power off, move the digital unit to turn on power
- Carbide tipped scriber
- Made of stainless steel
- Battery CR2032, data output
- Supplied with dust cover
- Optional accessory: data output cable, dial test indicator holder (part no. **6293-7**), clamp for protractors (part no. **2372-CLAMP**)

Part No.	Range	Accuracy	List Price ($)
1156-300	0-12"/0-300mm	±.0012"	633.00

PISTOL GRIP THREE POINTS BORE GAGES



Type A
.275-.5", steel measuring points

electronic indicator is not included

2124-E035



Type B
.5-2", carbide measuring points

electronic indicator is not included

2124-E1



Type C
2-4", carbide measuring points

electronic indicator is not included

2124-E4

- Optional accessory: electronic indicators (part no. **2103-10FE**, resolution .00005"/0.001mm), setting rings (part no. **6313**)

INSPECTION CERTIFICATE

Individual

Part No.	Range	Type	Accuracy	Setting ring (included)	Extension rod (included)	L	a	b	c	List Price ($)
2124-E035*	.275-.35"	A	.00016"	.275" DIA	4"	2"	.059"	.098"	—	568.00
2124-E0425*	.35-.425"	A	.00016"	.35" DIA	4"	2"	.059"	.098"	—	556.00
2124-E05*	.425-.5"	A	.00016"	.5" DIA	4"	2"	.059"	.098"	—	590.00
2124-E065*	.5-.65"	B	.00016"	.65" DIA	6"	2.6"	.020"	.236"	.177"	596.00
2124-E08*	.65-.8"	B	.00016"	.65" DIA	6"	2.6"	.020"	.236"	.177"	632.00
2124-E1*	.8-1"	B	.00016"	1" DIA	6"	3.64"	.020"	.315"	.236"	674.00
2124-E112*	1-1.2"	B	.00016"	1" DIA	6"	3.64"	.020"	.315"	.236"	718.00
2124-E16*	1.2-1.6"	B	.00016"	1.6" DIA	6"	3.88"	.020"	.551"	.472"	771.00
2124-E2*	1.6-2"	B	.00020"	1.6" DIA	6"	3.88"	.020"	.551"	.472"	822.00
2124-E25*	2-2.5"	C	.00020"	2.5" DIA	6"	4.48"	.020"	.689"	.571"	890.00
2124-E3*	2.5-3"	C	.00020"	2.5" DIA	6"	4.48"	.020"	.689"	.571"	949.00
2124-E35*	3-3.5"	C	.00020"	3.5" DIA	6"	4.48"	.020"	.689"	.571"	1,009.00
2124-E4*	3.5-4"	C	.00020"	3.5" DIA	6"	4.48"	.020"	.689"	.571"	1,074.00

*Supplied with manufacturer inspection certificate

setting rings are included

extension rods are included